
**European Union (EU) Council Directive 2004/108/EC
Electromagnetic Compatibility (EMC) and FCC Part 15
Subpart B Class B Test Report for Information
Technology Equipment**

Sensoray

2255S

July 17, 2013

Tests Conducted by:

ElectroMagnetic Investigations, LLC

20811 NW Cornell Road, Suite 600, Hillsboro, Oregon 97124, USA
Tele (503) 466-1160 Fax (503) 466-1170 support@emicomply.com

Test Summary Information	4
Revision History	5
Authorizations	5
Device Under Test Information	7
Device Under Test Selection Justification	8
Emissions Test Report	9
Radiated Emissions Information	10
Purpose	11
DUT Modifications	11
Radiated Emissions Results	12
Auxiliary Equipment in measurement area	12
Auxiliary Equipment outside measurement area	12
Cables	12
Measurement Bandwidths	13
ElectroStatic Discharge (ESD) Information	19
Purpose	20
DUT Modifications	20
ElectroStatic Discharge Results	21
Auxiliary Equipment in measurement area	21
Auxiliary Equipment outside measurement area	21
Cables	21
Radiated Immunity Information	26
Purpose	27
DUT Modifications	27
Radiated Immunity Results	28
Auxiliary Equipment in measurement area	28
Auxiliary Equipment outside measurement area	28
Cables	28
Radiated Immunity Data Sheet	29
Radiated Immunity Photographs	30
Electrical Fast Transients (burst) Immunity Information	33
Purpose	34
DUT Modifications	34
Electrical Fast Transient (burst) Immunity Results	35
Auxiliary Equipment in measurement area	35
Auxiliary Equipment outside measurement area	35
Cables	35
Electrical Fast Transient (burst) Immunity Data Sheet	36
RF Conducted Immunity Information.....	39
Purpose	39
DUT Modifications	40
Conducted Immunity Results	41
Auxiliary Equipment in measurement area	41

Auxiliary Equipment outside measurement area	41
Cables	41
Conducted Immunity Data Sheet	42
Conducted Immunity Photographs	43
Appendix A: Performance Criteria	47
Performance Criteria A	47
Performance Criteria B	47
Performance Criteria C	47
Performance Criteria D	48

Test Summary Information

Report Number: SEN20130612
Issue Date: July 17, 2013
Test Item: 2255S
Serial Number: 528768

Emissions:

Result	Product Standard	Test Standard	Description
Pass	EN 61000-6-3:2007+A1:2011 (IEC 61000-6-3:2006Ed2+A1:2010)/FCC Part 15 Subpart B Class B	EN55022:2010/CISPR 22Ed6:2008 Class B/FCC Part 15 Subpart B Class B	Radiated Emissions
N/A	EN 61000-6-3:2007+A1:2011 (IEC 61000-6-3:2006Ed2+A1:2010)/FCC Part 15 Subpart B Class B	EN55022:2010/CISPR 22Ed6:2008 Class B/FCC Part 15 Subpart B Class B	Conducted Emissions
N/A	EN61000-3-2:2006 +A1:2009+A2:2009	EN61000-3-2:2006+A1:2009+A2:2009 Class A/IEC61000-3-2:2005+A1:2008+A2:2009 Class A	Power line Harmonics
N/A	EN61000-3-3:2008/IEC 61000-3-3:2008	EN 61000-3-3:2008/IEC 61000-3-3:2008 Class A	Power line Voltage Fluctuation & Flicker

Immunity:

Result	Product Standard	Test Standard	Description	Performance Criteria	Test Levels
Pass	EN 61000-6-1:2007 (IEC 61000-6-1:2005)	EN61000-4-2:2008(IEC 61000-4-2:2008Ed.2)	Electrostatic Discharge Immunity	Criteria B	4 kV Contact Discharge 8 kV Air Discharge
Pass	EN 61000-6-1:2007 (IEC 61000-6-1:2005)	EN61000-4-3:2006+A1:2008+A2:2010(IEC61000-4-3:2006+A1:2007+A2:2010)	RF Field Immunity	Criteria A	3 V/m, 80-1000 MHz 3 V/m, 1.4-2 GHz 1 V/m, 2-2.7 GHz
Pass	EN 61000-6-1:2007 (IEC 61000-6-1:2005)	EN61000-4-4:2004+A1:2010 (IEC61000-4-4:2004+A1:2010)	Electrical Fast Transient/Burst (EFT) Immunity	Criteria B	1 kV peak
N/A	EN 61000-6-1:2007 (IEC 61000-6-1:2005)	EN61000-4-4:2006(IEC61000-4-5:2005)	Electrical Slow Transient (Surge) Immunity	Criteria B	1 kV peak – DM 2 kV peak - CM
Pass	EN 61000-6-1:2007 (IEC 61000-6-1:2005)	EN61000-4-6:2009(IEC61000-4-6:2008Ed.3)	RF Conducted Immunity	Criteria A	3 Vrms, 150 kHz to 80 MHz
N/A	EN 61000-6-1:2007 (IEC 61000-6-1:2005)	EN61000-4-8:2010(IEC 61000-4-8:2009Ed.2)	Magnetic Field Immunity	Criteria A	3 A/m, 50 & 60 Hz
N/A	EN 61000-6-1:2007 (IEC 61000-6-1:2005)	EN61000-4-11:2004(IEC61000-4-11:2004Ed.2)	Voltage Interruption Immunity	Various	30% dip, 10 mS, Perf. B; 60% dip, 100 mS, Perf. B; >95% drop, 5 S, Perf. C

- The Equipment was tested in the configuration and modes of operation provided by the client. Test levels were specified by the client within the test plan. Any additional tests not reported herein are the responsibility of the client as the overall product compliance is the responsibility of the client.
- This report may only be reproduced in its entirety. To reproduce this report in part, specific written permission must be obtained from ElectroMagnetic Investigations.
- The results presented in this test report pertain only to the test items described within this report.
- Specific test descriptions can be found in the specific individual section of the test report.

Deviations to the Test Standard

No Deviations were made to the standard test methods

Revision History

Version	Date Issued	Description of Revision

Authorizations

FCC: The 3-meter Semi-Anechoic Chamber and Conducted Emissions facilities are fully described in reports filed with the Federal Communications Commission. Corresponding letters of acceptance are maintained in our files.

Industry Canada: Accepted by Industry Canada for performance of radiated emissions measurements.

European Union (CE): ElectroMagnetic Investigations, LLC is equipped and capable of performing EMC CE compliance testing to European Union EMC CE requirements for Information Technology Equipment (ITE), Measurement, Control and Laboratory Equipment (MCL), and other equipment.

American Association of Lab Accreditations (A2LA): ElectroMagnetic Investigations is accredited to perform the tests contained within this report to the standards listed.



Testing Cert#2569.01

Report Approved By:



Signature

17 July 2013
Date

Henry Benitez
Name

Report Written By:



Signature

17 July 2013
Date

Jackie Benitez
Name

Testing Performed By:



Signature

01 July 2013
Date

Ryan Benitez
Name

Signature

Date

Name

Signature

Date

Name

Testing requested by:

Company Name:	Sensoray
Company Address:	7313 SW Tech Center Drive
City, State Zip:	Portland, OR. 97223
Test Requested By:	Alexander Kostromitin
Model:	2255S
First Date of Test:	June 12, 2013
Last Date of Test:	July 1, 2013
Date Samples Received:	June 12, 2013
Equipment Design Stage:	Production Representative
Equipment Condition:	Good

Device Under Test Information

Device Under Test	2255S
Functional Description of DUT	Multifunctional video codec capable of simultaneous capture from 16 video inputs
I/O Ports	4 video inputs and one USB
Clock Frequencies (>9kHz)	24 MHz, 27 MHz, 480 MHz
Modes of Operation	Receiving video signals
Operating System	MS Windows
Exercising Software	2255 Demo Application
Power Supply Voltage, Frequency	5V, USB

Device Under Test Selection Justification

- Sensoray certifies that product tested is a representative sample of unit to be sold.

I, Bill Tanner, Jr., representative for Sensoray verify that the product tested is representative of units to be sold.

Bill Tanner Jr

(Signature)

Emissions Test Report

Radiated Emissions Information

The client provided the test modes, configurations, and operational settings for the DUT and any supporting equipment.

The DUT and the AE that is designated to be placed in the measurement area were placed on a non-conducting tabletop 80 cm tall. Each device is placed on the tabletop 10 cm from its neighboring device. The excess cable length was draped off of the rear of the table. If the excess cable fell closer than 40 cm from the ground plane, the cable were bundled in non-inductive bundles of 30-40 cm loops (when possible) to maintain 40 cm in height. The measurement antenna was then placed 3 m from the closest approach of the DUT/AE system. Any AE that had to be placed outside the measurement area was setup either outside of the chamber or under the floor, depending on size and convenience.

The DUT and the AE were operated in the modes specified by the client while the emissions were measured.

To measure the emissions at the frequency range specified in this report, a preliminary scan was performed with a linearly polarized antenna while the turntable was rotated 360 degrees and the antenna mast was raised from 1 meter height to 4 meters in height in both a horizontal polarization and a vertical polarization. Any emissions that were found to be within 6 dB of the specified limit were then maximized to find the level that was recorded.

The maximization process included manual manipulation of the cables, continuous height scanning, and continuous azimuth scanning.

Device Under Test	2255S
Functional Description of DUT	Multifunctional video codec capable of simultaneous capture from 16 video inputs
Serial Number	528768
I/O Ports Populated for test	4 video inputs and one USB
Clock Frequencies (>9kHz)	24 MHz, 27 MHz, 480 MHz
Modes of Operation	Receiving video signals
Operating System (Version)	MS Windows
Exercising Software (Version)	2255 Demo Application
Power Supply Voltage, Frequency	5V, USB
Frequency Range Tested	30 MHz to 1 GHz

Purpose

The purpose of the testing is to determine if the 2255S is compliant to electromagnetic emission limits as specified by EN 61000-6-3:2007+A1:2011 (IEC 61000-6-3:2006Ed2+A1:2010)/FCC Part 15 Subpart B Class B to support compliance to the European Union EMC Directive 2004/108/EC, FCC Part 15 Subpart B Class B, and other regulations based on this standard.

The radiated emissions test was performed using the parameters above. If any work was done to investigate a worst-case setup, the worst-case setup would be listed. The testing was performed at a facility which meets the requirements set forth by ANSI C63.4, including but not limited to mains impedance, cable bundling, and Volumetric Normalized Site Attenuation. The emissions reported were maximized through a combination of turntable (or azimuth) maximization, tower (or height) maximization, and cable maximization.

DUT Modifications

Improved the grounding from the USB connector to the chassis ground on the DUT.

Radiated Emissions Results

Test Standards: EN55022:2010/CISPR 22Ed6:2008 Class B/FCC Part 15 Subpart B Class B

Radiated Emissions:Emissions are within specification limits.

Least Margin:6 dB at 960 MHz.

Test Measurement uncertainties ($k=2.05$):

Radiated Field strength at 3m measured with:

Chase Bicon (30 MHz – 1 GHz)..... ± 5.6 dB

Sample radiated emissions field strength measurement:

RF Reading from Spectrum Analyzer (dBuV) + Cable Loss Factor (dB) + Antenna Factor (dB) – Pre-Amplifier Amplification (dB) = Final Radiated Emission Level (dBuV/m).

Auxiliary Equipment in measurement area

Device	Manufacturer	Model Number	Serial Number
Laptop PC	Compaq	Presario V6000	CFN630001RP
Video camera	Sony	HDR-CX190	1229945
Mouse	Microsoft	Wheel Mouse Optical 1.1A USB	826
Laptop PC Power Supply	Hewlett Packard	592C60BYMT2E6G	F3-06040487570B

** Note: This includes all equipment connected to the DUT and located within the measurement area. Emissions from this equipment could increase the emissions measured.*

Auxiliary Equipment outside measurement area

Device	Manufacturer	Model Number	Serial Number
N/A	N/A	N/A	N/A

** Note: This includes all equipment isolated from the DUT and the measurement area. Emissions from this equipment will not increase the emissions measured.*

Cables

Type of Cable	Shield?	Length (m)	Ferrite?	Shipped with Product?	Connection 1	Connection 2
Video in 1	Yes	2m	N/A	No	Video camera	EUT - Video in 1
Video in 2	Yes	2m	N/A	No	Video camera	EUT - Video in 2
Video in 3	Yes	2m	N/A	No	Video camera	EUT - Video in 3
Video in 4	Yes	2m	N/A	No	Video camera	EUT - Video in 4
USB	Yes	2m	N/A	No	Laptop PC - USB	EUT - USB

Measurement Bandwidths

Frequency (MHz)	Peak (kHz)	Quasi-Peak (kHz)	Average (kHz)
0.15 – 30	9.0	9.0	9.0
30 – 1000	120	120	120
>1000	1000	N/A	1000

Radiated Emission Plots

ElectroMagnetic Investigations, LLC

Radiated Emissions Test Sheet

Revision 08

Job Reference Number:	SEN20130612	Temperature (°F):	78	Device Under Test (DUT):	2255S
Test Date:	13-Jun-2013	Relative Humidity (%):	31	Serial Number:	528768
Location:	Hillsboro	Barometric Pressure:	29.38	Test Filename:	SEN_RE_
Profile Version:	2.1	Test Distance (m):	3	Test Operator:	Ryan Benitez

Product Standard:	EN 61000-6-3:2007+A1:2011 (IEC 61000-6-3:2006Ed2+A1:2010)
Test Standard:	EN55022:2010/CISPR 22Ed6:2008 Class B

	Test Equipment	Manufacturer	Model Number	Calibration Due	Serial Number
Analyzer:	E4443A	Agilent	E4443A	18-Oct-2017	MY45300803
Pre-Amp:	LN1000	Amplifier Research	LN1000	12-Dec-2013	13993
Pre-Amp2:	HF-Preamp	MiteQ	AMF-4D-01001800-34-10P-GS	29-May-2014	1260489
Antenna:	Lab Chase	Chase	CBL 6112A	31-Mar-2014	2203
Antenna2:	Hom	ETS Lindgren	3117	7-May-2015	S009842
Antenna3:	N/A	N/A	N/A	N/A	N/A
Pre-Selector:	N/A	N/A	N/A	N/A	N/A
Site Source:	EMISS01	EMI	N/A	N/A	SS01

Deviations from Standard: None




RADIATED EMISSIONS DATA SHEET

Revision 08
7/10/2012

Customer:	Sensoray	Job Reference#:	SEN20130612
Contact:	Alexander Kostromitin	Date:	6/13/2013
DUT:	2255S	Temperature:	78°F
Serial Number:	528768	Humidity:	31%
Voltage/Freq:	5 VDC	Barometric Pressure:	29.38 inHg
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	EN 61000-6-3:2007+A1:2011 (IEC 61000-6-3:2006Ed2+A1:2010)		
	N/A		
Test Standard:	CISPR 22 B		

TEST RESULTS	Distance	RUN #
Pass	3m	1

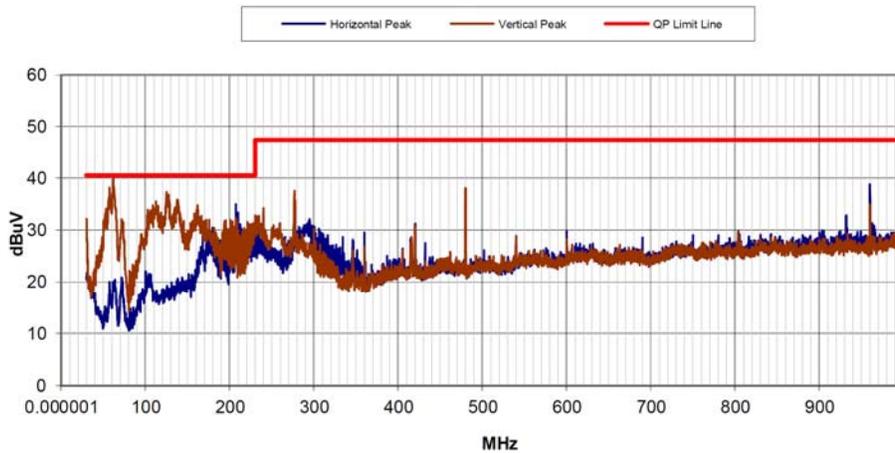

COMMENTS **SIGNATURE**

Class B; laptop and camera under table; Using Sony camera; *Ryan Benitez*

Peak Data				Final Data				
Freq (MHz)	Amplitude (dBμV)	Limit (dBμV)	Margin (dB) / Orientation	Freq (MHz)	Peak (dBμV)	QP (dBμV)	Limit (dBμV)	Margin (dB) / Orientation
61.816	40.172	40.46	0.288	57.597	37.302	31.442	40.46	9.018
108.764	34.716	40.46	5.744	61.963	38.505	32.435	40.46	8.025
112.644	35.496	40.46	4.964	124.967	35.966	29.626	40.46	10.834
124.866	37.293	40.46	3.167	137.357	33.435	27.825	40.46	12.635
137.282	35.844	40.46	4.616	207.75	31.096	21.356	40.46	19.104
161.726	34.755	40.46	5.705	960.059	37.508	34.388	40.46	6.072
207.316	34.929	40.46	5.531					
210.032	33.389	40.46	7.071					
211.39	30.534	40.46	9.926					
212.748	31.08	40.46	9.38					
222.254	31.125	40.46	9.335					
480.08	37.795	47.46	9.665					
960.036	38.789	47.46	8.671					

Radiated Emissions Photographs



SEN20130612
Sensoray
2255S
28 June 2013





Immunity Test Report

ElectroStatic Discharge (ESD) Information

The client provided the test modes, configurations, and operational settings for the DUT and any supporting equipment.

Table-top DUTs and the AE that is designated to be placed in the measurement area were placed on a non-conducting tabletop 80 cm tall with a horizontal coupling plane. The DUT and AE were isolated from the horizontal coupling plane by a thin non-conducting surface 0.5 mm thick. The horizontal coupling plane was attached to the a ground plane on the floor by two 470 Ω resistors. A vertical coupling plane was placed on the table-top for vertical coupling plane tests. The vertical coupling plane was also terminated to the ground plane on the floor by two 470 Ω resistors.

Floor standing DUTs and AE were placed on the ground plane with a 10 cm thick insulator isolating the equipment from the ground plane. The only ground connection allowed was the ground connection that was created by the power connector, or that which would normally be present in the application of the DUT.

The ground plane on the floor extended past the edge of the tabletop or the DUT by at least one half a meter on all sides. The DUT was placed at least 1 meter from all conducting surfaces.

The DUT and the AE were operated in the modes specified by the client while the ESD test was performed. The DUT was subjected to both air and contact discharges. The specific number of discharges at each voltage level is specified within this report. Any contact discharges were applied to all conductive surfaces as specified in the test standard. Any air discharges were applied to non-conducting surfaces as specified in the test standard. If any response was seen within the DUT system, it was noted in the report. The testing was performed with the DUT fully configured with appropriate AE and connecting cables.

All targets tested were recorded along with the type of discharge, the number of discharges, voltage level, polarity, and the reaction of the DUT system.

Device Under Test	2255S
Functional Description of DUT	Multifunctional video codec capable of simultaneous capture from 16 video inputs
Serial Number	528768
I/O Ports Populated for test	4 video inputs and one USB
Clock Frequencies (>9kHz)	24 MHz, 27 MHz, 480 MHz
Modes of Operation	Receiving video signals
Operating System (Version)	MS Windows
Exercising Software (version)	2255 Demo Application
Power Supply Voltage, Frequency	5V, USB
Test Level	4 kV contact discharge, 8 kV air discharge

Purpose

The purpose of the testing is to determine if the 2255S is compliant to electromagnetic immunity requirements as specified by EN 61000-6-1:2007 (IEC 61000-6-1:2005) to support compliance to the European Union EMC Directive 2004/108/EC and other regulations based on this standard.

The ESD test was performed using the parameters above. If any work was done to investigate a worst-case setup, the worst-case setup would be listed.

DUT Modifications

No modifications were done to the DUT. No EMI suppression was added to the cabling. The DUT was tested as delivered to EMI.

ElectroStatic Discharge Results

Test Standard: EN61000-4-2:2008(IEC 61000-4-2:2008Ed.2)

ElectroStatic Discharge:DUT performed to Criteria B.

Auxiliary Equipment in measurement area

Device	Manufacturer	Model Number	Serial Number
Laptop PC	Compaq	Presario V6000	CFN630001RP
Video camera	Sony	HDR-CX190	1229945
Mouse	Microsoft	Wheel Mouse Optical 1.1A USB	826
Laptop PC Power Supply	Hewlett Packard	592C60BYMT2E6G	F3-06040487570B

* Note: This includes all equipment connected to the DUT and located within the measurement/testing area.

Auxiliary Equipment outside measurement area

Device	Manufacturer	Model Number	Serial Number
N/A	N/A	N/A	N/A

* Note: This includes all equipment isolated from the DUT and the measurement/testing area.

Cables

Type of Cable	Shield?	Length (m)	Ferrite?	Shipped with Product?	Connection 1	Connection 2
Video in 1	Yes	2m	N/A	No	Video camera	EUT - Video in 1
Video in 2	Yes	2m	N/A	No	Video camera	EUT - Video in 2
Video in 3	Yes	2m	N/A	No	Video camera	EUT - Video in 3
Video in 4	Yes	2m	N/A	No	Video camera	EUT - Video in 4
USB	Yes	2m	N/A	No	Laptop PC - USB	EUT - USB

ElectroStatic Discharge Data Sheet

ElectroMagnetic Investigations, LLC

ESD Test Sheet

Revision 08

Job Reference Number: **SEN20130612**
 Test Date: **28-Jun-2013**
 Location: **Hillsboro**

Temperature (°F): **80**
 Relative Humidity (%): **33**
 Barometric Pressure: **29.38**

Device Under Test (DUT): **2255S**
 Serial Number: **528768**
 Voltage/Freq: **5 VDC**
 Test Operator: **Ryan Benitez**


Product Standard: **EN 61000-6-1:2007 (IEC 61000-6-1:2005)**
EN61000-4-2:2008(IEC 61000-4-2:2008Ed.2)
±4kV Contact / ±8kV Air
 Test Standard: **Performance Class B**

	Test Equipment	Manufacturer	Model Number	Calibration Due	Serial Number
ESD Generator	ESD	Noiseken	ES2002 & TC815R	September 30, 2016	ESS0827941 & ESS0817835

Test Location	Discharge Type	Voltage Level	Voltage Polarity	Number of Events	Comments / DUT Response	Stated Criteria	Pass / Fail	Picture
Vertical side plane	Contact	2 kV	±	10	No degradation of performance observed	B	Pass	Yes
	Contact	4 kV	±	10	No degradation of performance observed	B	Pass	
Horizontal side plane	Contact	2 kV	±	10	No degradation of performance observed	B	Pass	
	Contact	4 kV	±	10	No degradation of performance observed	B	Pass	
BNC connectors (4)	Contact	2 kV	±	10	No degradation of performance observed	B	Pass	
	Contact	4 kV	±	10	No degradation of performance observed	B	Pass	
USB connector	Contact	2 kV	±	10	No degradation of performance observed	B	Pass	
	Contact	4 kV	±	10	No degradation of performance observed	B	Pass	
Body of unit	Contact	2 kV	±	10	No degradation of performance observed	B	Pass	
	Contact	4 kV	±	10	No degradation of performance observed	B	Pass	
LEDs	Air	4 kV	±	10	No degradation of performance observed	B	Pass	
	Air	8 kV	±	10	No degradation of performance observed	B	Pass	

Deviations from Standard:

ElectroStatic Discharge Photographs







Radiated Immunity Information

The client provided the test modes, configurations, and operational settings for the DUT and any supporting equipment.

The DUT and the AE that is designated to be placed in the measurement area were placed on a non-conducting tabletop 80 cm tall. Each device is placed on the tabletop 10 cm from its neighboring device. The excess cable length was draped off of the rear of the table. If the excess cable fell closer than 40 cm from the ground plane, the cable were bundled in non-inductive bundles of 30-40 cm loops (when possible) to maintain 40 cm in height. The transmit antenna was then placed 3 m from the DUT/AE system. Any AE that had to be placed outside the measurement area was setup either outside of the chamber or under the floor, depending on size and convenience.

The DUT and the AE were operated in the modes specified by the client while the susceptibility was measured.

The field was calibrated to a uniform field in a fully anechoic chamber as per the requirements within IEC61000-4-3 using an empty room. The power required to produce this field was recorded for playback when the DUT is placed within the chamber. The uniform field was created over a vertical plane of dimensions 1.5 m by 1.5 m placed 0.8 m above the floor. If the DUT can be completely exposed to the field using a smaller uniform surface, the surface was reduced to meet the appropriate size of the DUT, but the surface would never be smaller than 0.5 m by 0.5 m.

The face of the DUT and it corresponding system was placed at vertical surface used for calibration.

Device Under Test	2255S
Functional Description of DUT	Multifunctional video codec capable of simultaneous capture from 16 video inputs
Serial Number	528768
I/O Ports Populated for test	4 video inputs and one USB
Clock Frequencies (>9kHz)	24 MHz, 27 MHz, 480 MHz
Modes of Operation	Receiving video signals
Operating System (Version)	MS Windows
Exercising Software (version)	2255 Demo Application
Power Supply Voltage, Frequency	5V, USB
Test Level	3 V/m, 80-1000 MHz, 3V/m, 1-2.7 GHz

Purpose

The purpose of the testing is to determine if the 2255S is compliant to electromagnetic immunity limits as specified by EN 61000-6-1:2007 (IEC 61000-6-1:2005) to support compliance to the European Union EMC Directive 2004/108/EC and other regulations based on this standard.

The radiated immunity test was performed using the parameters above. If any work was done to investigate a worst-case setup, the worst-case setup would be listed.

DUT Modifications

No modifications were done to the DUT. No EMI suppression was added to the cabling. The DUT was tested as delivered to EMI.

Radiated Immunity Results

Test Standard: EN61000-4-3:2006+A1:2008+A2:2010(IEC61000-4-3:2006+A1:2007+A2:2010

Radiated Immunity: DUT performed to Criteria A.

Auxiliary Equipment in measurement area

Device	Manufacturer	Model Number	Serial Number
Laptop PC	Compaq	Presario V6000	CFN630001RP
Video camera	Sony	HDR-CX190	1229945
Mouse	Microsoft	Wheel Mouse Optical 1.1A USB	826
Laptop PC Power Supply	Hewlett Packard	592C60BYMT2E6G	F3-06040487570B

** Note: This includes all equipment connected to the DUT and located within the measurement/testing area.*

Auxiliary Equipment outside measurement area

Device	Manufacturer	Model Number	Serial Number
N/A	N/A	N/A	N/A

** Note: This includes all equipment isolated from the DUT and the measurement/testing area.*

Cables

Type of Cable	Shield?	Length (m)	Ferrite?	Shipped with Product?	Connection 1	Connection 2
Video in 1	Yes	2m	N/A	No	Video camera	EUT - Video in 1
Video in 2	Yes	2m	N/A	No	Video camera	EUT - Video in 2
Video in 3	Yes	2m	N/A	No	Video camera	EUT - Video in 3
Video in 4	Yes	2m	N/A	No	Video camera	EUT - Video in 4
USB	Yes	2m	N/A	No	Laptop PC - USB	EUT - USB

Radiated Immunity Data Sheet

ElectroMagnetic Investigations, LLC

Radiated Immunity Test Sheet

Revision 08

Job Reference Number: SEN20130612
 Test Date: 1-Jul-2013
 Location: Hillsboro
 Test Level (V/m) <= 1 GHz: 3 V/m
 Test Level (V/m) 1 to 2 GHz: 3 V/m
 Test Level (V/m) >= 2 GHz: 3 V/m

Temperature (°F): 80
 Relative Humidity (%): 33
 Barometric Pressure: 29.38
 Calibration Points: 8 pt

Device Under Test (DUT): 2255S
 Serial Number: 528768
 Voltage/Freq: 5 VDC
 Test Filename: SEN_RI_
 Test Operator: Ryan Benitez

Ryan Benitez

Product Standard: EN 61000-6-1:2007 (IEC 61000-6-1:2005)
 EN61000-4-3:2006+A1:2008+A2:2010(IEC 61000-4-3:2006+A1:2007+A2:2010)
 Test: Standard: 3 V/m, 80% AM (1 kHz), 80 to 1000 MHz Performance Class A


	Test Equipment	Manufacturer	Model Number	Calibration Due	Serial Number
Antenna 1	3141	EMCO	3141	N/A	1204
Antenna 2	3117	ETS Lindgren	3117	7-May-2015	S009842
Probe	Probe	EMCO	HI 6005	30-Aug-2016	33983
Signal Generator	Sig Gen	Rohde & Schwarz	SME 03	21-Feb-2018	DE14511
Signal Generator 2	8673	HP	8673D	26-Oct-2015	2938A01008
Amplifier	Amp	IFI	CMX5001	N/A	2151-1196
Amplifier 2	AR Amp	AR	25S1G4A	N/A	300668


Test Details	Polarization	Azimuth	Start (MHz)	Stop (MHz)	Criteria	Comments / DUT Response	Pass / Fail	Picture
Front	Horizontal	0°	80	2700	A	No degradation of performance observed	Pass	Yes
	Vertical	0°	80	2700	A	No degradation of performance observed	Pass	
Left side	Horizontal	90°	80	2700	A	No degradation of performance observed	Pass	
	Vertical	90°	80	2700	A	No degradation of performance observed	Pass	
Back	Horizontal	180°	80	2700	A	No degradation of performance observed	Pass	
	Vertical	180°	80	2700	A	No degradation of performance observed	Pass	
Right side	Horizontal	270°	80	2700	A	No degradation of performance observed	Pass	
	Vertical	270°	80	2700	A	No degradation of performance observed	Pass	

Deviations from Standard: None

Radiated Immunity Photographs



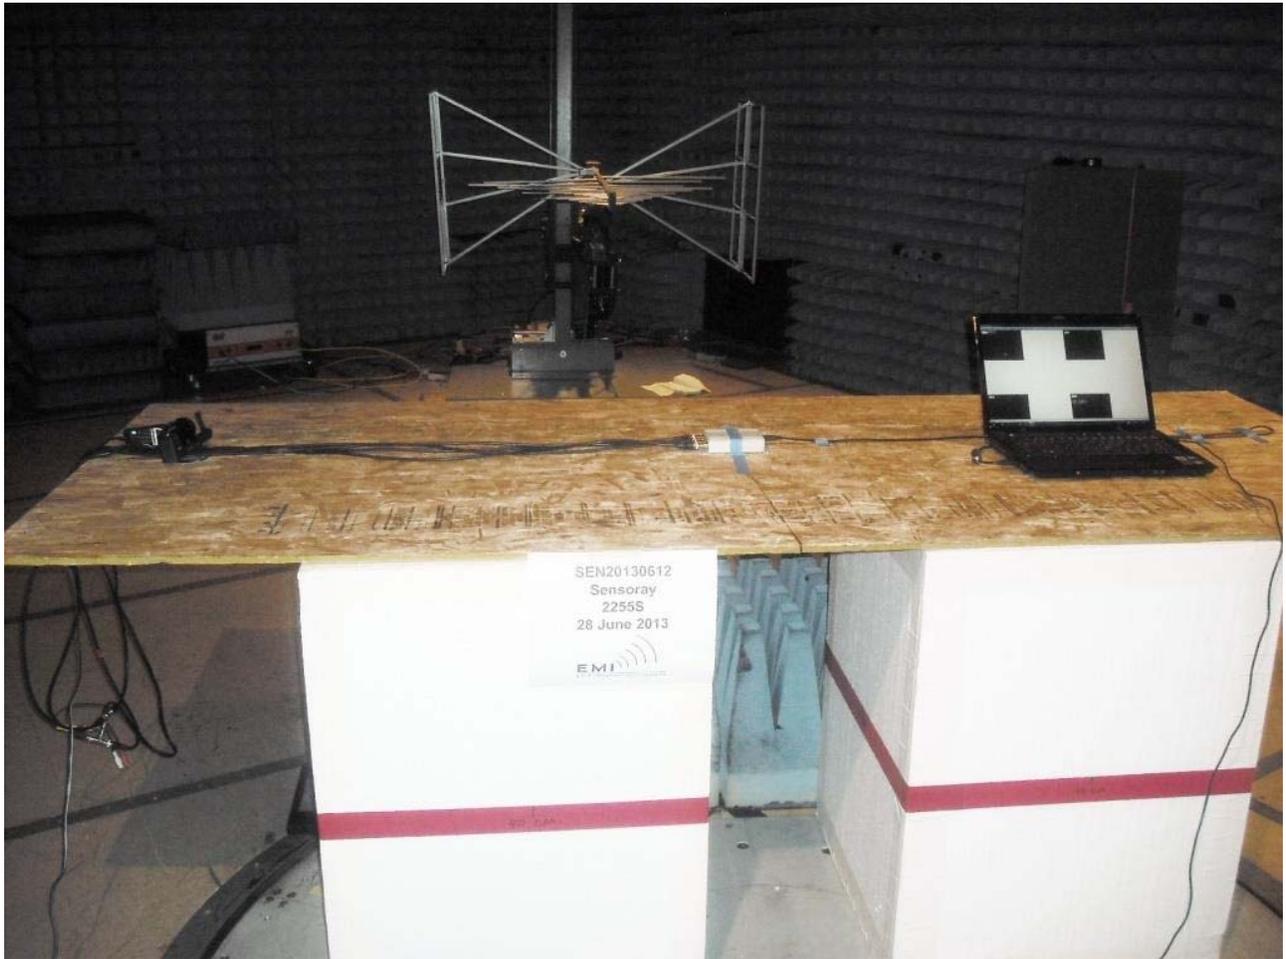


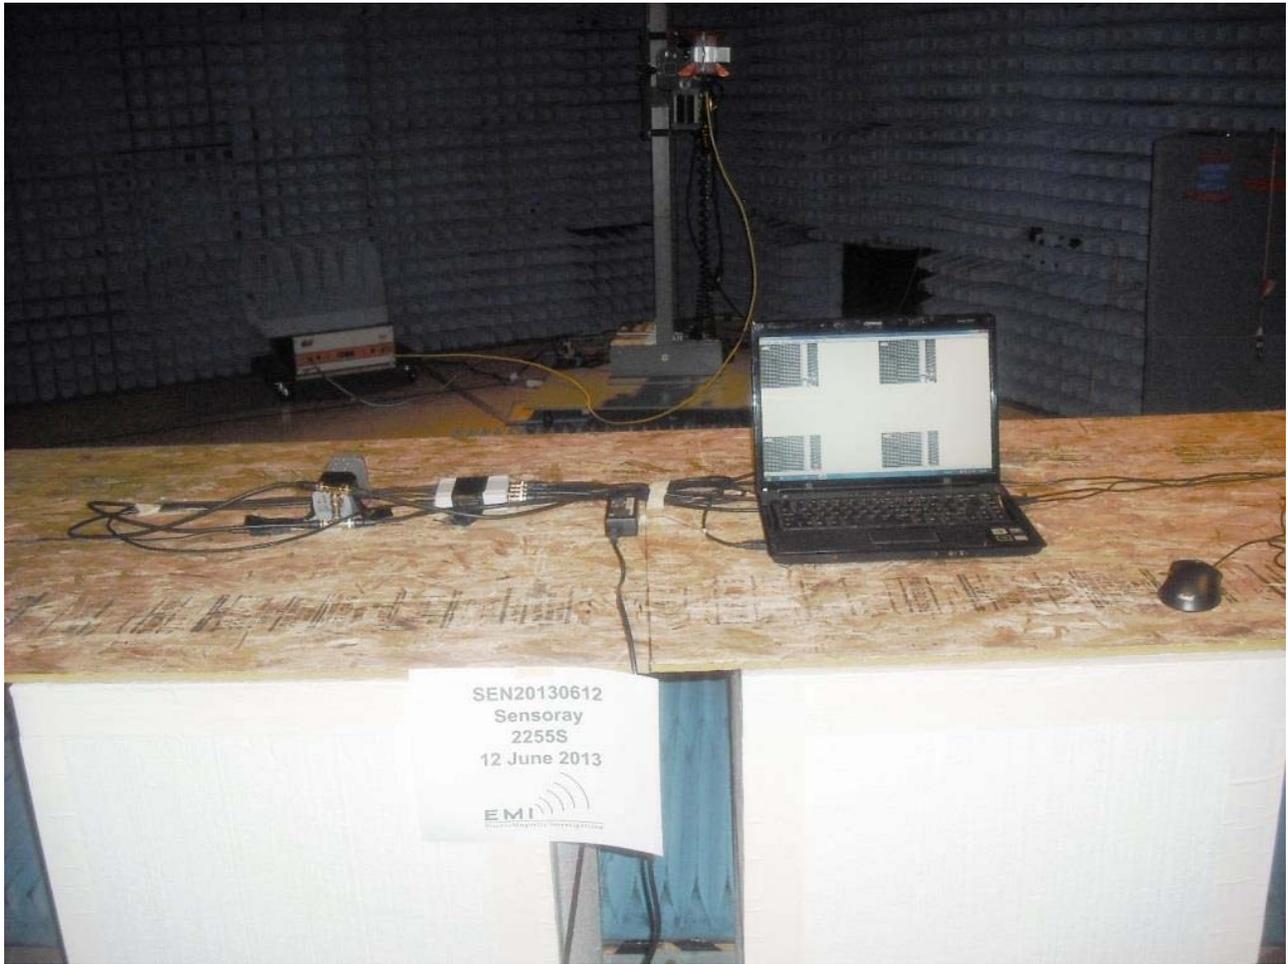

Electrical Fast Transients (burst) Immunity Information

The client provided the test modes, configurations, and operational settings for the DUT and any supporting equipment.

The DUT and the AE that is designated to be placed in the measurement area were placed 10 cm above a conducting surface. Each device is placed on the tabletop 10 cm from its neighboring device. The excess cable length was serpentine (not coiled) on the tabletop 10 cm above the ground plane. The power lines subjected to the transient were plugged directly into the generator. I/O's that were greater than 3 m in length were passed through a capacitive clamp, and also exposed to the transient.

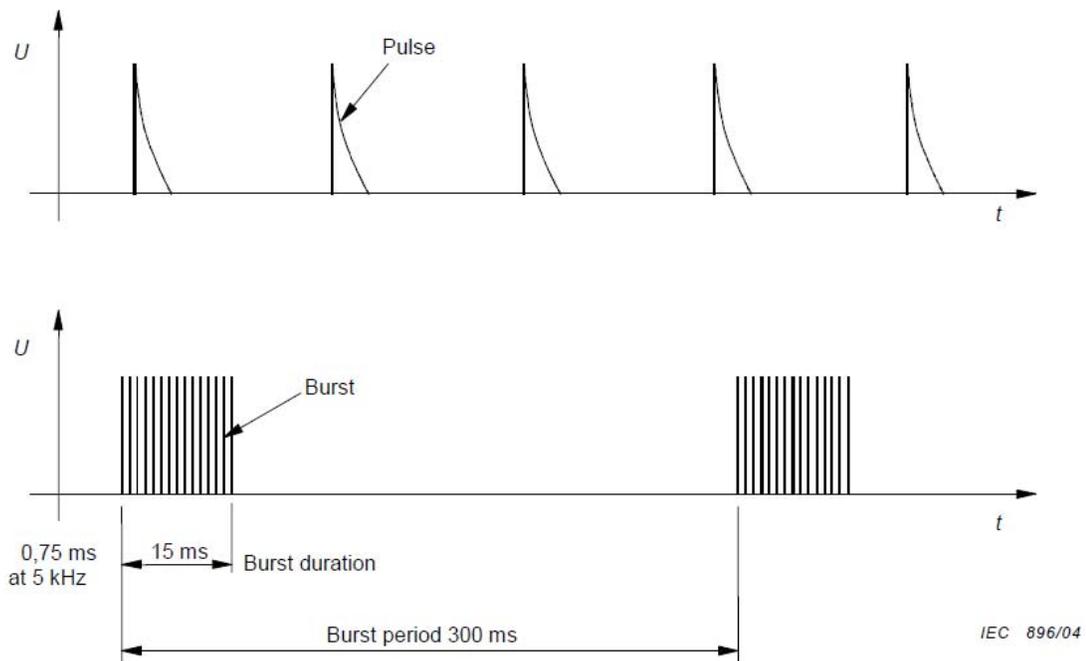

The waveform of the transient can be seen in the following figure.

Figure: EFT/Burst Waveform

The DUT and the AE were operated in the modes specified by the client while the susceptibility was measured.

Device Under Test	2255S
Functional Description of DUT	Multifunctional video codec capable of simultaneous capture from 16 video inputs
Serial Number	528768
I/O Ports Populated for test	4 video inputs and one USB
Clock Frequencies (>9kHz)	24 MHz, 27 MHz, 480 MHz
Modes of Operation	Receiving video signals
Operating System (Version)	MS Windows
Exercising Software (version)	2255 Demo Application
Power Supply Voltage, Frequency	5V, USB
Test Level	1 kV Peak

Purpose

The purpose of the testing is to determine if the 2255S is compliant to electromagnetic immunity limits as specified by EN 61000-6-1:2007 (IEC 61000-6-1:2005) to support compliance to the European Union EMC Directive 2004/108/EC and other regulations based on this standard.

The electrical fast transient immunity test was performed using the parameters above. If any work was done to investigate a worst-case setup, the worst-case setup would be listed.

DUT Modifications

No modifications were done to the DUT. No EMI suppression was added to the cabling. The DUT was tested as delivered to EMI.

Electrical Fast Transient (burst) Immunity Results

Test Standard: EN61000-4-4:2004+A1:2010 (IEC61000-4-4:2004+A1:2010)

EFT / Burst Immunity: DUT performed to Criteria A.

Auxiliary Equipment in measurement area

Device	Manufacturer	Model Number	Serial Number
Laptop PC	Compaq	Presario V6000	CFN630001RP
Video camera	Sony	HDR-CX190	1229945
Mouse	Microsoft	Wheel Mouse Optical 1.1A USB	826
Laptop PC Power Supply	Hewlett Packard	592C60BYMT2E6G	F3-06040487570B

** Note: This includes all equipment connected to the DUT and located within the measurement/testing area.*

Auxiliary Equipment outside measurement area

Device	Manufacturer	Model Number	Serial Number
N/A	N/A	N/A	N/A

** Note: This includes all equipment isolated from the DUT and the measurement/testing area.*

Cables

Type of Cable	Shield?	Length (m)	Ferrite?	Shipped with Product?	Connection 1	Connection 2
Video in 1	Yes	2m	N/A	No	Video camera	EUT - Video in 1
Video in 2	Yes	2m	N/A	No	Video camera	EUT - Video in 2
Video in 3	Yes	2m	N/A	No	Video camera	EUT - Video in 3
Video in 4	Yes	2m	N/A	No	Video camera	EUT - Video in 4
USB	Yes	2m	N/A	No	Laptop PC - USB	EUT - USB

Electrical Fast Transient (burst) Immunity Data Sheet

ElectroMagnetic Investigations, LLC

Burst Test Sheet

Revision 08

Job Reference Number: **SEN20130612**
 Test Date: **28-Jun-2013**
 Location: **Hillsboro**

Temperature (°F): **80**
 Relative Humidity (%): **33**
 Barometric Pressure: **29.38**

Device Under Test (DUT): **2255S**
 Serial Number: **528768**
 Voltage/Freq: **5 VDC**
 Test Operator: **Ryan Benitez**
Ryan Benitez

Product Standard: **EN 61000-6-1:2007 (IEC 61000-6-1:2005)**
EN61000-4-4:2004+A1:2010(IEC 61000-4-4:2004+A1:2010)
 ±1 kV Pk AC Ports
 ±0.5 kV Pk DC Ports
 ±0.5 kV Pk Signal & I/O
 ±0.5 kV Pk Functional Earth
 Test: Standard: **Performance B**

	Test Equipment	Manufacturer	Model Number	Calibration Due	Serial Number
Generator	UCS	EMTest	UCS 500M4	N/A	0800-45
Injection Clamp	C Clamp	EMTest	Cap. Coupling Clamp	N/A	0105-09

Injection Line	Test Number	Injection Method	Level	Stated Criteria	Comments / DUT Response	Pass / Fail	Filename	Picture
USB	1	C. Clamp	500 V	B	No degradation of performance observed	Pass		Yes
Video 1	2	C. Clamp	500 V	B	No degradation of performance observed	Pass		
Video 2	3	C. Clamp	500 V	B	No degradation of performance observed	Pass		
Video 3	4	C. Clamp	500 V	B	No degradation of performance observed	Pass		
Video 4	5	C. Clamp	500 V	B	No degradation of performance observed	Pass		

Deviations from Standard: **None**

Electrical Fast Transient (burst) Immunity Photographs





RF Conducted Immunity Information

The client provided the test modes, configurations, and operational settings for the DUT and any supporting equipment.

The DUT and the AE that is designated to be placed in the measurement area were placed on a non-conducting surface 10 cm above a ground plane. Each device is placed on the tabletop 10 cm from its neighboring device. The cables were serpentine 3 cm above the ground plane. Any cables not being tested were fitted with a decoupling device. Power entered the DUT and the AE through a coupling decoupling network which was bonded to the ground plane.

The DUT and the AE were operated in the modes specified by the client while the susceptibility was measured.

The RF field was calibrated with a 150 Ω calibration jig as specified within IEC 61000-4-6. The power required to produce the required field strength was recorded for playback when the DUT is placed within the test fixture.

The power lines of the DUT were tested with the appropriate CDN. The power passed through the CDN and the RF was coupled onto the power line.

The I/O cables greater than 3 m were tested with either a CDN designed for the specific I/O or a current clamp. The I/O specific CDN was placed in series with the system and tested like the power CDN. The clamp was placed around the I/O line being tested and placed as close to the DUT as possible, but no more than 30 cm away.

Device Under Test	2255S
Functional Description of DUT	Multifunctional video codec capable of simultaneous capture from 16 video inputs
Serial Number	528768
I/O Ports Populated for test	4 video inputs and one USB
Clock Frequencies (>9kHz)	24 MHz, 27 MHz, 480 MHz
Modes of Operation	Receiving video signals
Operating System (Version)	MS Windows
Exercising Software (version)	2255 Demo Application
Power Supply Voltage, Frequency	5V, USB
Test Level	3 Vrms, 150 kHz to 80 MHz

Purpose

The purpose of the testing is to determine if the 2255S is compliant to electromagnetic immunity limits as specified by EN 61000-6-1:2007 (IEC 61000-6-1:2005) to support compliance to the European Union EMC Directive 2004/108/EC and other regulations based on this standard.

The RF conducted immunity test was performed using the parameters above. If any work was done to investigate a worst-case setup, the worst-case setup would be listed.

DUT Modifications

No modifications were done to the DUT. No EMI suppression was added to the cabling. The DUT was tested as delivered to EMI.

Conducted Immunity Results

Test Standard: EN61000-4-6:2009(IEC61000-4-6:2008Ed.3)

Radiated Immunity: DUT performed to Criteria A.

Auxiliary Equipment in measurement area

Device	Manufacturer	Model Number	Serial Number
Laptop PC	Compaq	Presario V6000	CFN630001RP
Video camera	Sony	HDR-CX190	1229945
Mouse	Microsoft	Wheel Mouse Optical 1.1A USB	826
Laptop PC Power Supply	Hewlett Packard	592C60BYMT2E6G	F3-06040487570B

** Note: This includes all equipment connected to the DUT and located within the measurement/testing area.*

Auxiliary Equipment outside measurement area

Device	Manufacturer	Model Number	Serial Number
N/A	N/A	N/A	N/A

** Note: This includes all equipment isolated from the DUT and the measurement/testing area.*

Cables

Type of Cable	Shield?	Length (m)	Ferrite?	Shipped with Product?	Connection 1	Connection 2
Video in 1	Yes	2m	N/A	No	Video camera	EUT - Video in 1
Video in 2	Yes	2m	N/A	No	Video camera	EUT - Video in 2
Video in 3	Yes	2m	N/A	No	Video camera	EUT - Video in 3
Video in 4	Yes	2m	N/A	No	Video camera	EUT - Video in 4
USB	Yes	2m	N/A	No	Laptop PC - USB	EUT - USB

Conducted Immunity Data Sheet

ElectroMagnetic Investigations, LLC

Conducted Immunity Test Sheet

Revision 08

Job Reference Number: SEN20130612
 Test Date: 28-Jun-2013
 Location: Hillsboro
 Test Level (V/m): 3 Vrms

Temperature (°F): 80
 Relative Humidity (%): 33
 Barometric Pressure: 29.38

Device Under Test (DUT): 2255S
 Serial Number: 528768
 Voltage/Freq: 5 VDC
 Test Filename: SEN_CI_
 Test Operator: Ryan Benitez

Ryan Benitez


Product Standard: EN 61000-6-1:2007 (IEC 61000-6-1:2005)
 EN61000-4-6:2009(IEC 61000-4-6:2008Ed.3)
 3 Vrms AC/DC/ Earth
 3 Vrms I/O (>3m)
 Test Standard: Performance A


	Test Equipment	Manufacturer	Model Number	Calibration Due	Serial Number
Analyzer	E4443A	Agilent	E4443A	18-Oct-2017	MY45300803
Injection Probe 1	M3	FCC	FCC-801-M3-25A	20-Sep-2015	4054
Injection Probe 2	BCI	FCC	F-120-9A	N/A	401
Injection Probe 3	N/A	N/A	N/A	N/A	N/A
Monitor Probe	Current Probe	FCC	F-33-1	10-Feb-2015	908
Amplifier	Amp	IFI	CMX5001	N/A	2151-1196
Signal Generator	Sig Gen	Rohde & Schwarz	SME 03	21-Feb-2018	DE14511
6 dB Pad	Pad6b	JFW	50FHAO-006-250N	24-Jan-2014	N/A


Injection line	Test Number	Injection Method	Start (MHz)	Stop (MHz)	Criteria	Comments / DUT Response	Pass / Fail	Picture
USB	1	Bulk Current	0.15	80	A	No degradation of performance observed	Pass	Yes
Video 1	2	Bulk Current	0.15	80	A	No degradation of performance observed	Pass	
Video 2	3	Bulk Current	0.15	80	A	No degradation of performance observed	Pass	
Video 3	4	Bulk Current	0.15	80	A	No degradation of performance observed	Pass	
Video 4	5	Bulk Current	0.15	80	A	No degradation of performance observed	Pass	


Deviations from Standard: None

Conducted Immunity Photographs

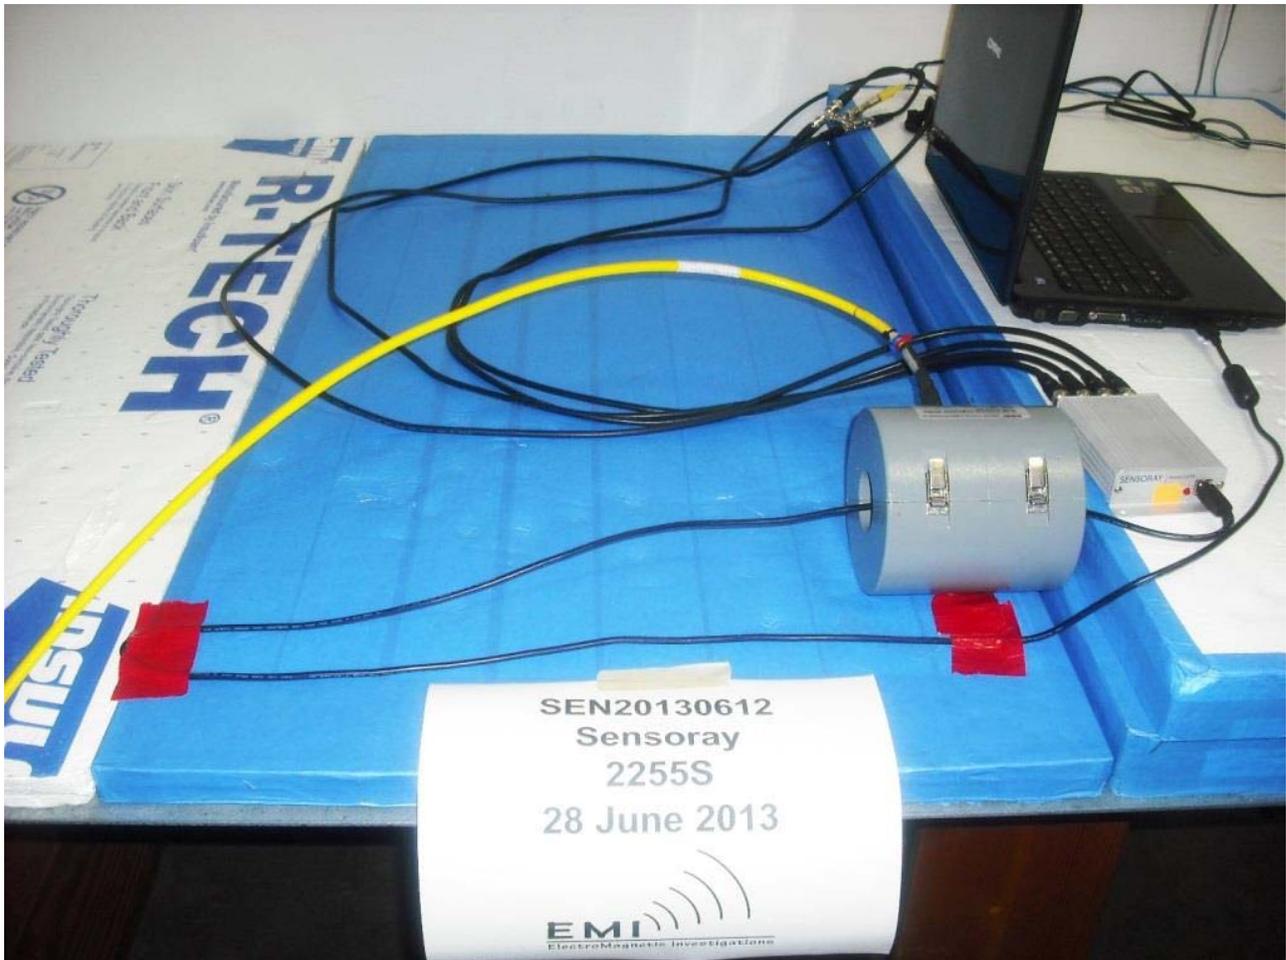

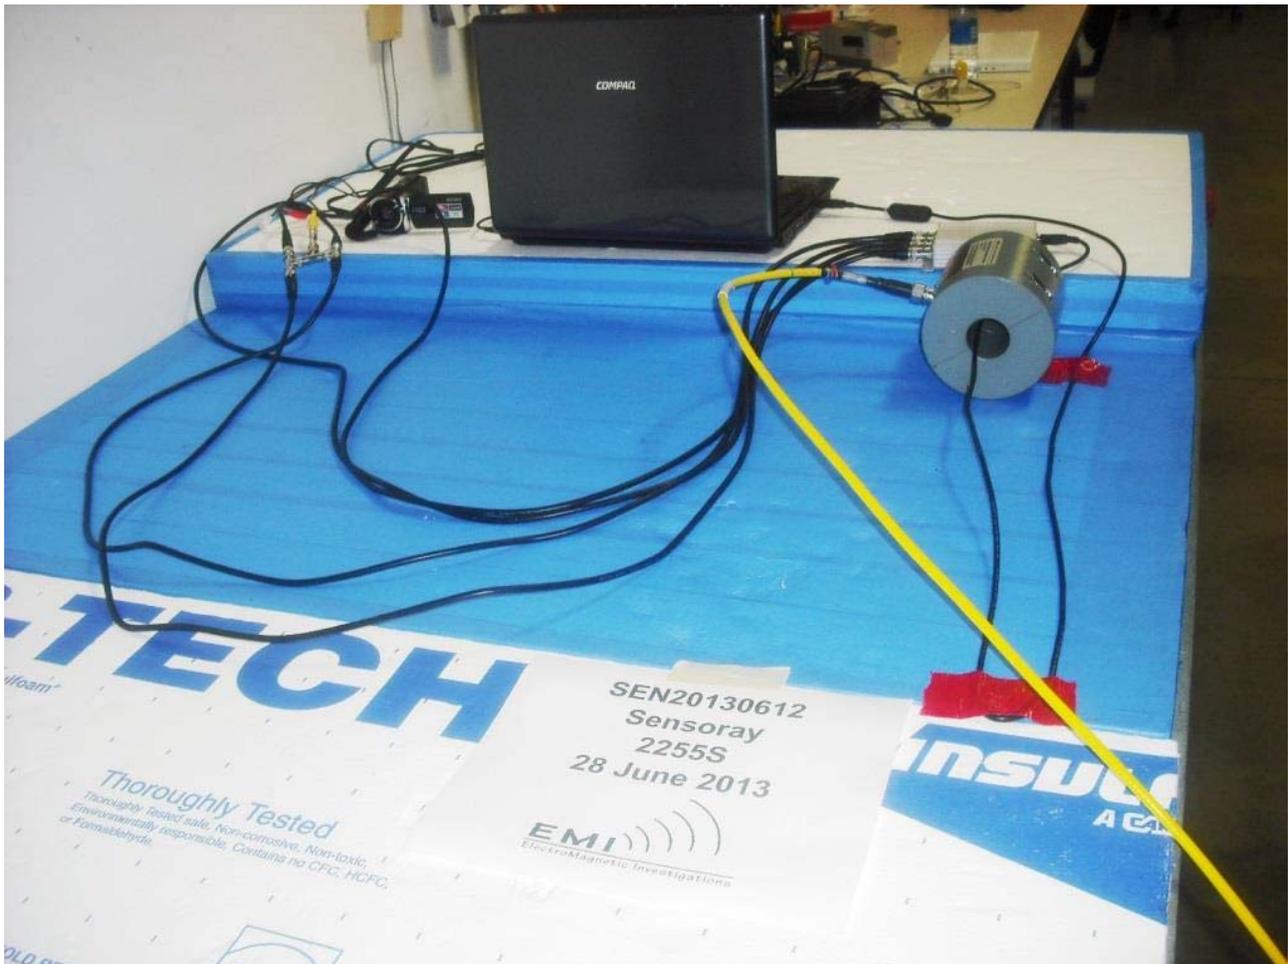

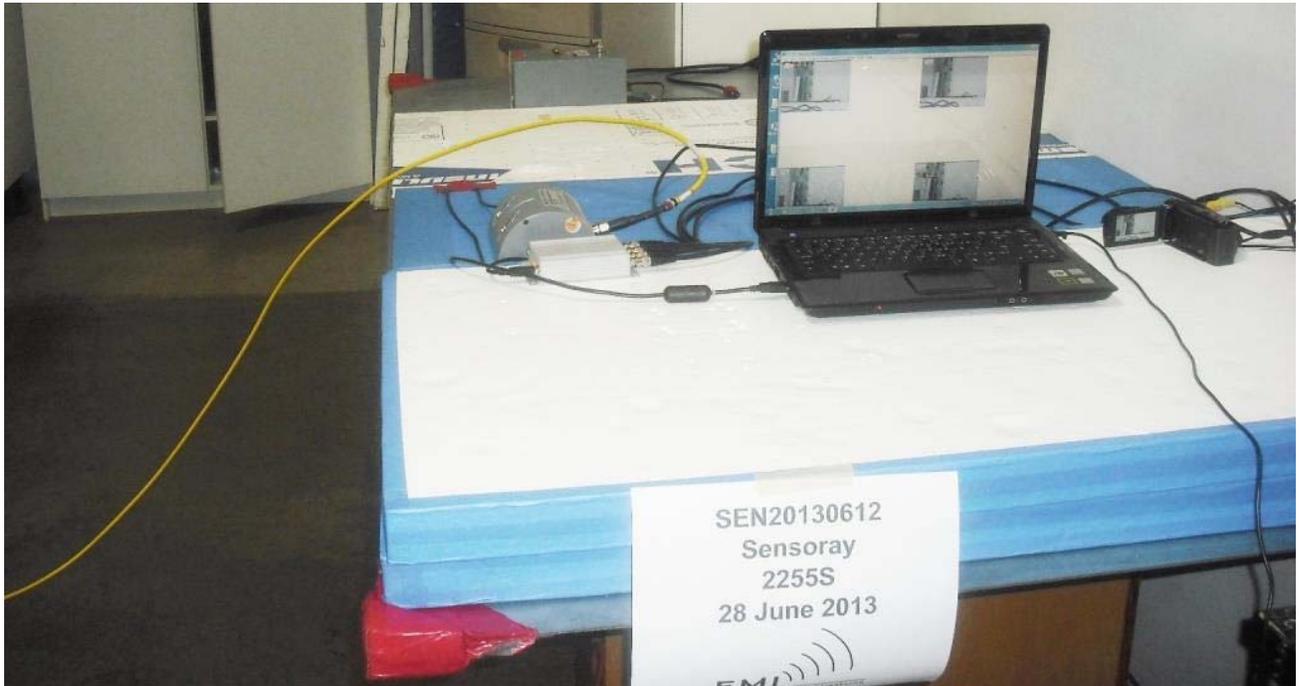

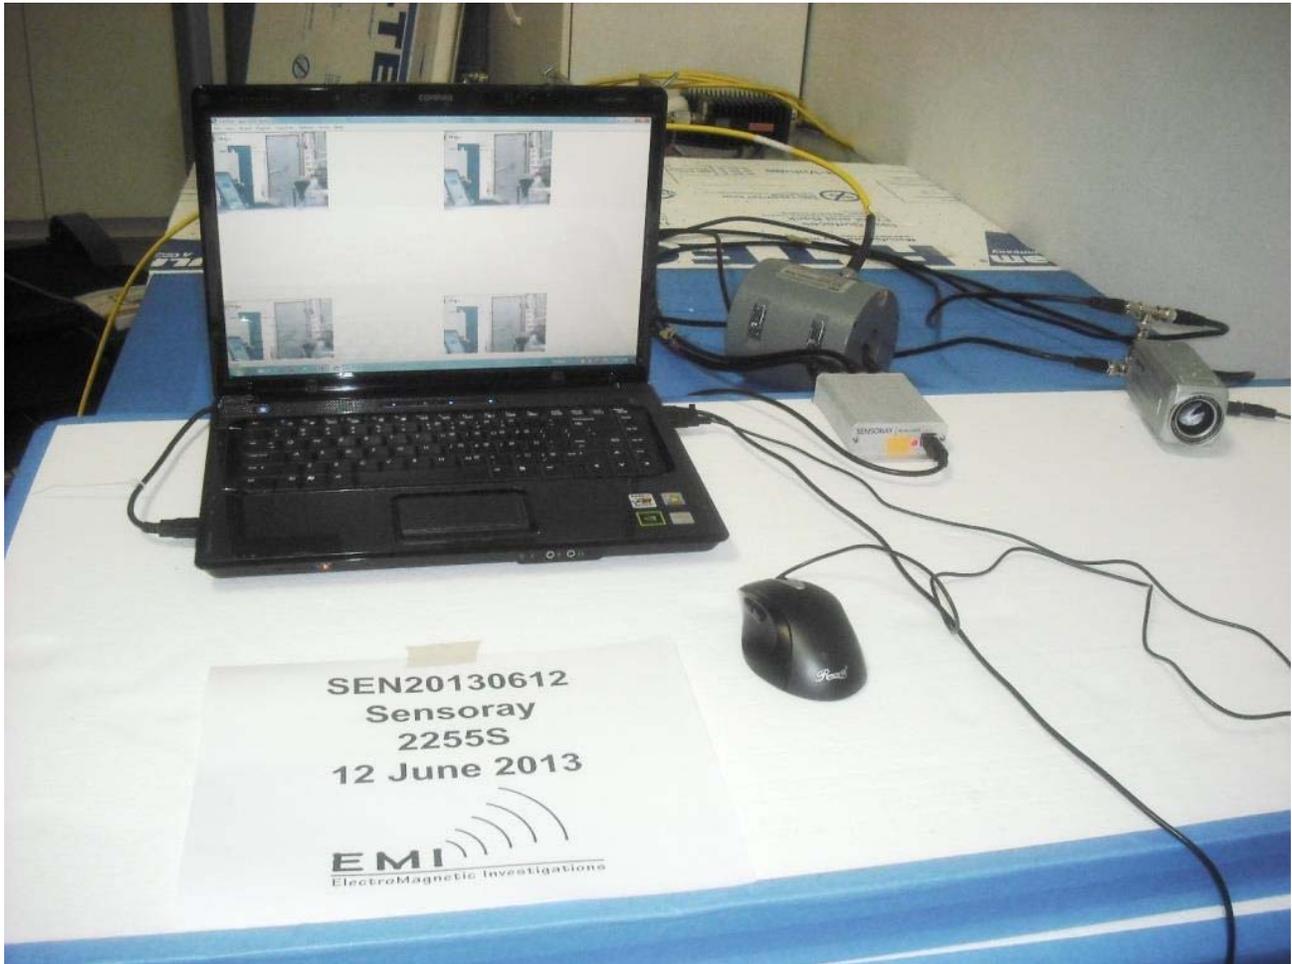

Appendix A: Performance Criteria

During the immunity testing, the Device under test is observed for variances beyond what is considered normal. The client is ultimately responsible for the compliance of the DUT and its supporting system. However, ElectroMagnetic Investigations tries to indicate to the client the performance of the product. In the case where the referenced standard specifies the acceptable deviations, the performance criteria noted within this report corresponds to it. In the case that the customer specifies the acceptable performance, ElectroMagnetic Investigations simply reports as per the test plan.

In general, the test performance criteria follows the pattern listed.

Performance Criteria A

- The DUT does not have any noticeable deviations in its performance before, during or after the application of the EMC test.
- If a range of performance is specified as normal operation, the DUT did not have any readings outside of this range before, during or after the application of the EMC test.

Performance Criteria B

- The DUT does not have any deviations of performance before or after the application of the EMC test, but during the application a deviation is noted that is not considered normal operation. When the EMC test is paused or completed the DUT recovered on its own and did not require any user intervention to return it to normal operation.
- If a range of performance is specified as normal operation, the DUT's performance was outside of this range during the application of the test, but recovered on its own and operated within its normal range after the application of the EMC test.
- No permanent damage occurred to the DUT or any AE as a result of the disturbance.

Performance Criteria C

- The DUT was operating normally before the application of the EMC test, but during the application, the DUT stopped operating normally, and did not recover after the application of the EMC test until an operator intervened. This includes but is not limited to:
 - Power cycling the DUT,
 - Restarting the exercising software on the DUT, and

-
- Unplugging and replugging the DUT or any AE.
 - The act of “recovering” the DUT must be something that could be accomplished by the customer with little training.
 - No permanent damage occurred to the DUT or any AE as a result of the disturbance.

Performance Criteria D

- The DUT was operating normally before the application of the EMC test, but could not be made to function normally after the completion of the test.
- The recovery of the DUT took significant expertise to return to normal operation.
- There was permanent damage to the DUT during the application of the EMC test.